

Features



- Fanless
- SAMSUNG® S3C2440A-40 400 MHz CPU
- 128MB NAND Flash, 2MB NOR Flash
- DC 9~32V wide-ranging power input
- NEMA 4/IP 65 compliant front panel
- Sealed resistive touch screen
- SDHC, Plug play supported




Specifications



System	
Processor	SAMSUNG® S3C2440A-40 400 MHz CPU
System Memory	128MB SDARM
System Chipset	N/A
External I/O Port	<ul style="list-style-type: none"> • 2 x USB 1.1 Host connector • 1 x RJ-45 port • 1 x DB-9 (COM 1, RS-232) • 1 x DB-9, COM2 (RS-422/485 selection, default RS-485) • 1 x Audio, Line-out • 1 x DC power input
Storage	<ul style="list-style-type: none"> • 128MB NAND Flash • 2MB NOR Flash • 1 x SD slot (standard SD/SDHC card, up to 32GB, support Plug & Play)
Expansion Slots	None
OS Support	Windows® CE 5.0
LCD	
Display Type	10.4" TFT-LCD
Max. Resolution	640x480
Max. Color	262K
Luminance (cd/m ²)	250
View Angle	H:130° / V:110°
Backlight Lifetime	50,000 hrs
Touch Screen	
Type	Sealed analog resistive
Light Transmission	80%
Power Supply	
Power Input	DC 9~32V

Dimension

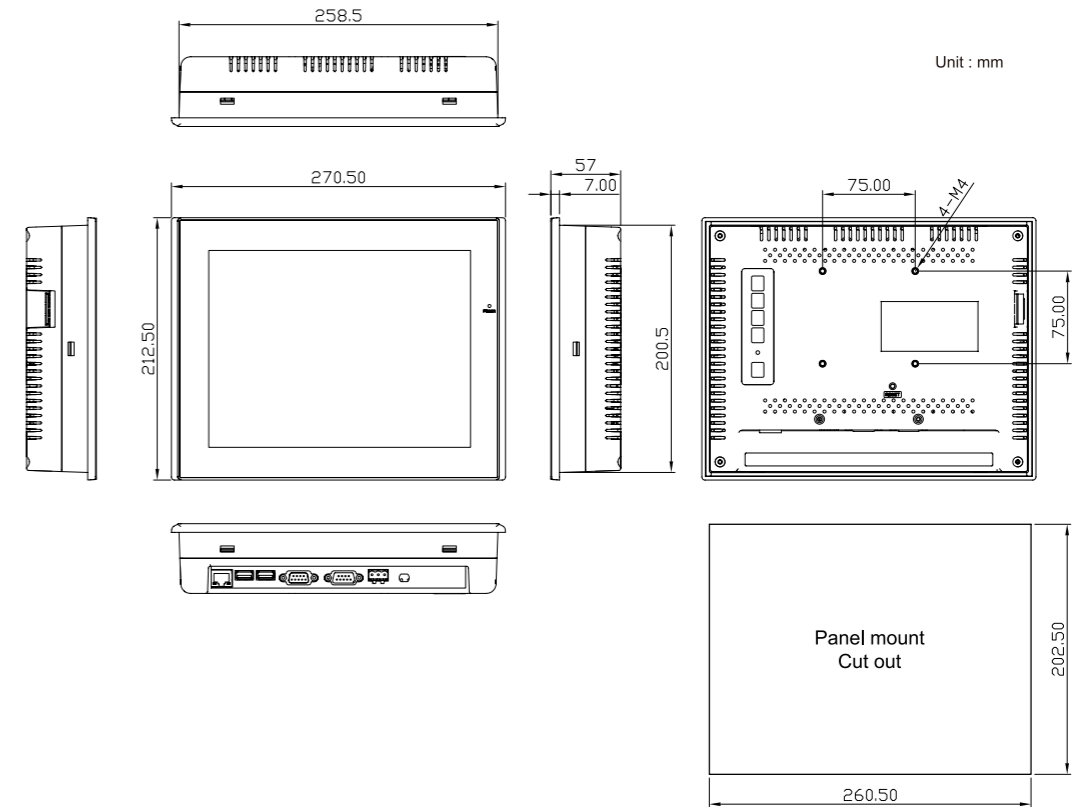

Mechanical

Construction	Plastic molding housing
IP Rating	NEMA 4/ IP 65 compliant front panel
Mounting	Panel / VESA 75x75 Mount
Dimension	270.5(W) x 212.5(H) x 57(D)mm
Net Weight	1.9 kgs

Environmental

Operating Temperature	0~50 °C
Storage Temperature	-20~60 °C
Storage Humidity	10~90% @40 °C non-condensing
Certificate	Meet CE/FCC Class A

Ordering Information

AHM-6100	10.4" Fanless HMI w/SAMSUNG® S3C2440A
AHM-6100T	10.4" Fanless HMI w/SAMSUNG® S3C2440A with touch screen