



## Features

- Fanless
- Intel® GM45 + ICH9M-E chipset
- Resistive or GFG touch for option
- Support 1 x PCI slot expansion, PCIe x 1 for option
- DC 11~32V wide-range power input



## Specifications


System	
Processor	Intel® Socket P Core™ 2 Duo processor with FSB 667/800/1066 MHz
System Memory	2 x 200-pin DDR2 667/800MHz SO-DIMM slot, up to 2GB each slot
System Chipset	Intel® GM45 + ICH9M-E
External I/O Port	<ul style="list-style-type: none"> <li>• 4 x USB 2.0 connector</li> <li>• 2 x RJ-45 LAN connector (GbE)</li> <li>• 2 x DB-9 RS232 (COM 1/2)</li> <li>• 1 x DB-9 RS 232 (COM 3) option for RS422/485</li> <li>• 1 x DB-15 VGA Port</li> <li>• 1 x HDMI Port</li> <li>• 1 x DVI-D Port</li> <li>• 1 x PS2 Keyboard/Mouse</li> <li>• 1 x MIC, 1 x LINE-Out, LINE-in</li> <li>• 1 x 3-pin DC Power input terminal</li> </ul>
Storage	1 x 2.5" SATA HDD, 1 x CF slot (internal)
Expansion Slots	1 x 32-bit PCI Slot (standard), 1 x PCIe x 1 Slot (optional)
OS Support	Windows® XP Pro, XP Embedded, Windows® 7

LCD	
Display Type	19" TFT-LCD
Max. Resolution	1280x1024
Max. Color	16.7M
Luminance (cd/m²)	300
View Angle	H:170° / V:160°
Backlight Lifetime	50,000hrs

Touch Screen	
Type	Analog resistive (optional)
Light Transmission	80%

Power Supply	
Power Input	DC 11~32V

## Dimension

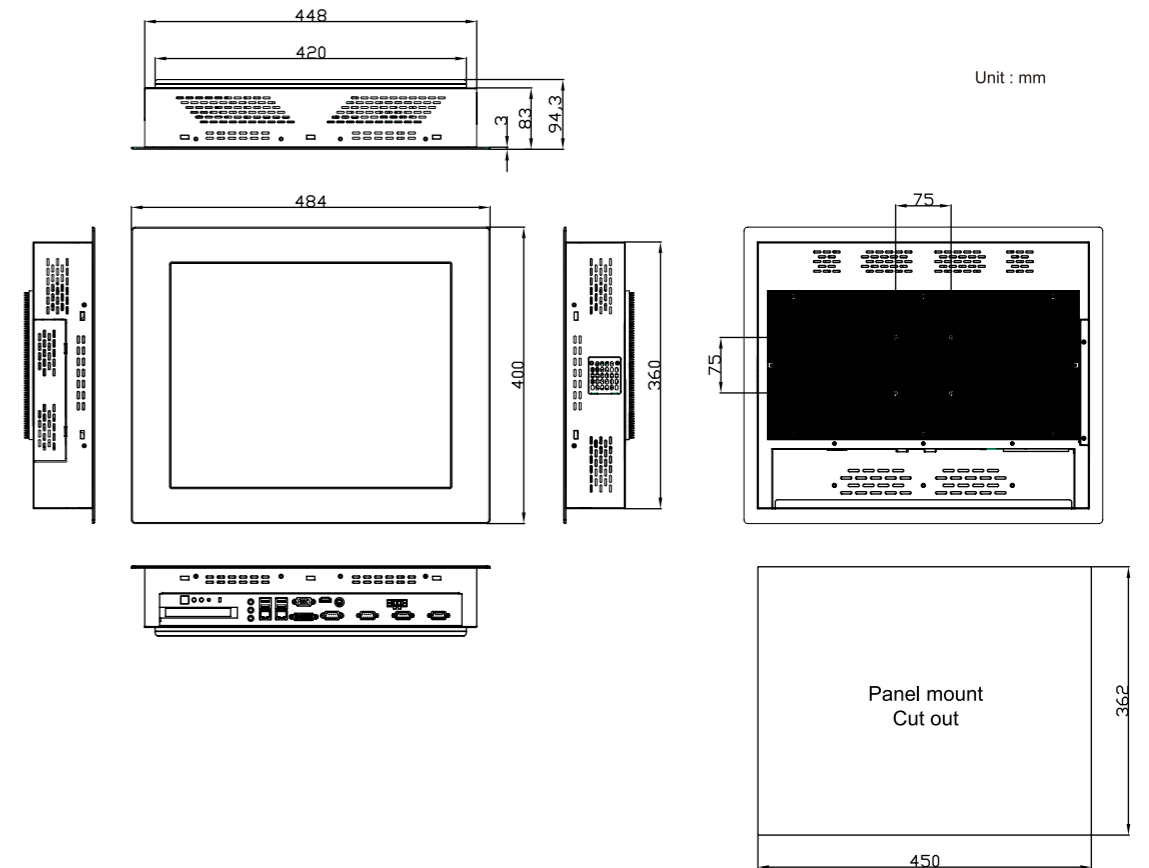

Mechanical	
Construction	Heavy-duty steel chassis
Color	Black
IP Rating	NEMA 4 / IP 65 compliant front panel
Mounting	Panel / VESA 75x75 Mount
Dimension	484(W)x400(H)x94.3(D)mm
Net weight	12 kgs

Environmental	
Operating Temperature	0~50 °C
Storage Temperature	-20~60 °C
Storage Humidity	10~90% @40 °C, non-condensing
Certificate	Meet CE/FCC Class A

Ordering Information	
APC-3917A	19" Fanless Intel® GM45 panel PC w/1 x PCI slot
APC-3917AT	19" Fanless Intel® GM45 panel PC w/1 x PCI slot, touch screen