

FX5202A - For DIN Rail

AMD Geode LX-800 Small System with VGA, 2S, 1 LAN, 2 USB, Audio and CF



Features

- Fanless and low power consumption design
- One PS/2 KB/MS
- 512MB DDR-DRAM inside
- One VGA
- One LAN (10/100 base TX)
- 2USB(V2.0)
- One CompactFlash slot
- One 2.5" Hard disk space
- 4 LED Indicators (Power, CF/HDD,LAN)

Specifications

CPU Board: AMD Geode LX-800 Lower Power CPU board with 512MB DDR SDRAM inside
One So-DIMM socket up to 1GB DDR-DRAM

I/O Outlets: 2 Serial Port (RS-232)
1 PS/2 Keyboard/Mouse
2 USB (2.0)
1 CRT
1 Mic-in and 1 line-Out Audio Connector
1 Terminal Block for DC power input with Power switch
1 LAN (10/ 100BASE-TX)
1 push button reset switch

Storage Bay: One 2.5" HDD space, and 1 CompactFlash slot.
LED Indicators: 1 power LED , 1 HDD/CF access LED, 2 LAN LEDs.


Power Req.: DC 12 - 24V, 11VA maximum With 2.5" HDD and 24V input vlotage.

Operating Temperature: 0~50 degree C. (32~122 degree F.)

Dimensions: 123.0mm (H) x 120.0mm (D) x 44.0 mm (W)

Accessory: CBL-KB+MS-Y type keyboard and mouse adapter cable
1 Din Rail mounting kit with 3 screws.
1 2-pin apartable terminal block.
1 44-pin flat cable and 4 screws for fixing and connecting a 2.5" hard disk drive.

Compliances CE /FCC /Rohs

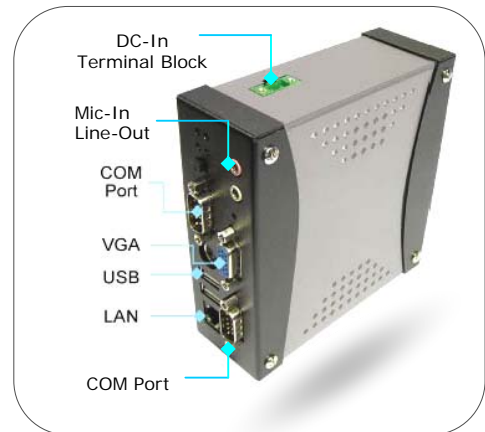

Order Information

Model	Description	Drivers
FX5202A	AMD Geode LX-800 Embedded System with LAN, 4USB ports, 2COM Ports and 512MB DDR RAM.	* VGA/Audio: WinXP/2K, Linux * LAN Novell 3.X / 4.X Win95/98/NT, OS2, Linux NDIS, MSLAN



FabiaTech Corp.

TEL:886-2-22789586 FAX:886-2-22789575
4F-3, No.18, Lane 609, Chung-Hsin Rd., Sec.5, San-Chung City, Taipei Hsien, Taiwan, R.O.C.

www.fabiatech.com