

# WLP-6821-15

## 15" VIA C7 Fanless & Ultra Slim Panel PC



### Features

- True Fanless Thermal Solution
- VIA C7 1.0G or 1.5G CPU
- IP65 / NEMA4 Water / Dust Proof on Front & Rear Bezel
- LAN / PCMCIA / CF / Audio / USB2.0 / Mini-PCI interfaces
- Resistive and Capacitive, IR touch screens are optional
- Anti-vibration HDD



## System

CPU	Onboard VIA C7 1.0 GHz (9W) or 1.5GHz
Chipset	VIA CN700 + VT8237R plus
BIOS	AMI BIOS Support ACPI Function with PXE function
Cache	Level-1 128K / Level-2 128K (CPU integrated)
VGA	VIA CN700 built-in AGP 8X graphics, shared system memory up to 64MB
Audio	AC97 Audio Codec, 2+2 watts power amplifier
LAN	VT6103 10/100Base-Tx Fast Ethernet PHY, support WOL/PXE function
Memory	1 x DDR2 533 SODIMM socket supports up to 1GB memory
I/O	VIA VT8237R plus
IDE	UDMA 133 EIDE interface x 2 Serial ATA interface x 1
GPIO	4-bit input, 4-bit output
WDT	1~255 minutes, software programmable
H/Monitor	CPU & system temperature monitoring, CPU and system fans speed monitoring

### Storage

HDD Internal 2.5" HDD drive bay x 1

### Expansion

Mini-PCI 32-bit Mini-PCI socket  
(support 802.11b/g and DVB modules) x 1

PCMCIA PCMCIA Type I/II 32-bit Card Bus slot x 1

CF Bootable Compact Flash slot for CF type I/II storages x 1

### Display

Chipset VIA CN700 Integrated Graphics / Video Accelerator

Memory 8/16/32/64 MB frame buffer using system memory

Panel 15" TFT LCD (resolution: 1024 x 768, 350 nits)

Model	G150XG01 V1	
Resolution (pixel)	XGA (1024 x 768)	
Active Area (mm)	304.1 x 228.1	
Pixel Pitch (mm)	0.297	
Number of Colors	262K	
View Angle (H/V)	140 / 120	
Brightness (cd/m2)	350	
Contrast Ratio	700:1	
Response Time (ms) (at 25°C)	8	
Interface	LVDS	
Supply Voltage (V)	3.3	
Backlight	2 CCFL	
Weight (g)	326.5 x 253.5 x 12.0	

Characteristics	Resistive (4 wire or 5 wire or 8 wire)	Capacitive	Infrared touch (IR)
Touch Resolution	4096x4096	4096x4096	4096x4096
Stylus use possible beyond finger	No Limitation, can use any stylus	Need special conductive stylus	No limitation, can use any stylus
Glove use possible	Any type glove	Only very thin latex glove	Any type glove
Light transmittance	80±3%	90% above	100%
Mohs	3H	7 Mohs	
Accuracy	98.50%	99%	
Response time	20 ms	3 ms	
Touch screen Life	WLP-7821-19 5 wire:35 million touches	Specified to over 200 million touches Coatings can wear	Large number of photo diodes and photo transistors effect long-term reliability. Specified to over 500 million touches Coatings can wear

### External I/O

USB USB 2.0 x 4

COM DB-9 x 3 (RS-232 x 2, RS-232/422/485 x 1)

LAN RJ-45 x 1

KB/Mouse PS/2 Keyboard & Mouse x 1

Audio Line-in, Line-out, and Mic-in audio jacks

Power DC-In connector x 1

Switch ATX power switch & RESET switch

### Mechanical & Environmental

Power Input DC 12V ~ 28V

Power Adaptor AC90 ~ 264V / 47 ~ 63 Hz

Operating Temperature 0~40 °C (fanless)  
0~55 °C (for CF/DOM storage)

Storage Temperature -20~80 °C


Relative Humidity 10%~90%, non-condensing

Dimensions 398(L) x 330(W) x 58(D) mm

Weight 6 kg

# 15" VIA C7 Fanless & Ultra Slim Panel PC

## Drawing

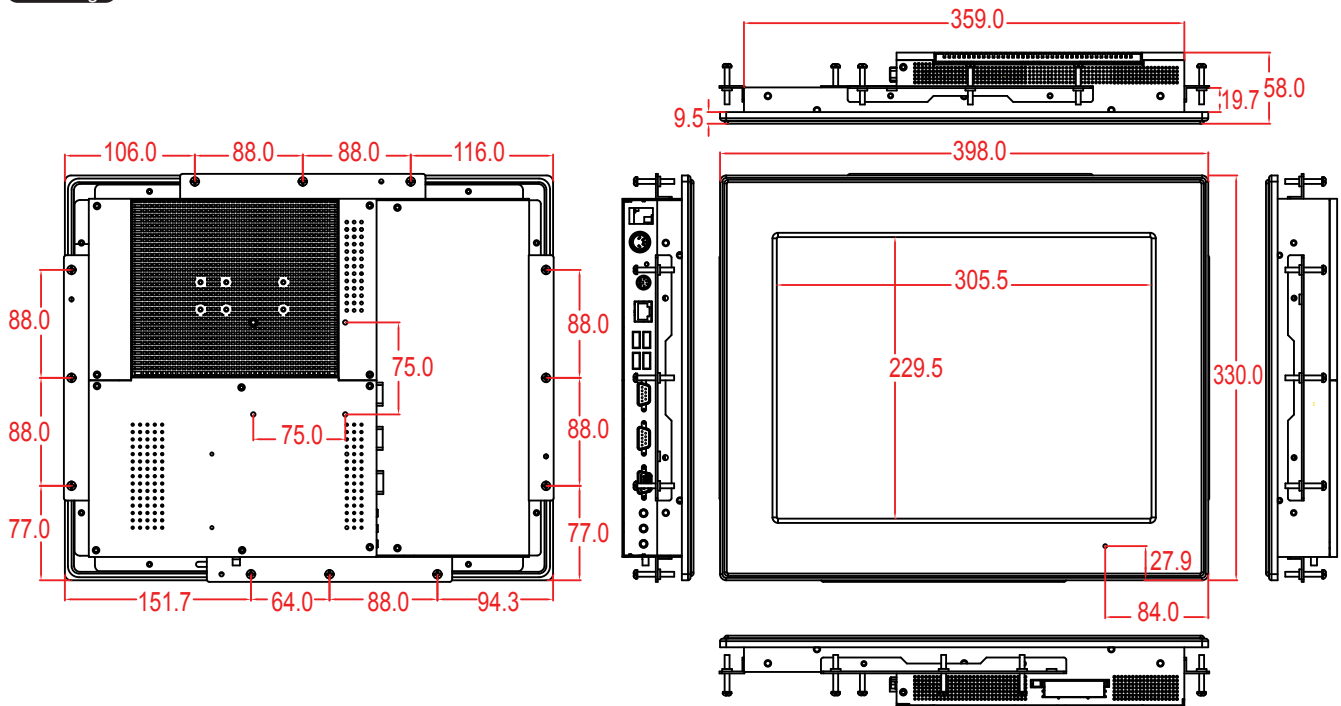

1.

Fanless Panel PC

2.

Medical All-in-one Solution

3.

Engine Box

4.

All-in-one Digital Signage Solution



5.

XPe Solution

6.

Remote Device Management (WRDM)

## Fully-integrated I/O

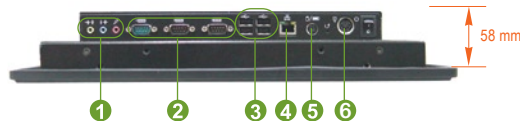

- 1 Line-in, Line-out, Mic-in
- 2 Series port
- 3 USB
- 4 RJ-45 interface
- 5 PS2 K/B & Mouse
- 6 DC Power jack

## Ordering information

1. WLP-6821-15-BKRT-C7 1.0G-512-40 (resistive touch screen)
2. WLP-6821-15-BKCT-C7 1.0G-512-40 (capacitive touch screen)
3. WLP-6821-15-BKRT-C7 1.5G-512-40 (resistive touch screen)
4. WLP-6821-15-BKCT-C7 1.5G-512-40 (capacitive touch screen)

IR touch screen are also available