

FX5403

AMD Geode LX-800 Embedded System with 2 LAN, Audio, 4COM and 4USB



Features

- Fanless and low power consumption design
- AMD Geode LX-800 Low-power CPU
- 256MB DDR RAM inside system
- One PS/2 KB/MS
- One VGA
- 2 LAN (10/100/1000M Base-TX) Ports
- 4 COM Ports
- 4USB(V2.0)
- One CompactFlash Slot
- Space for one 2.5" HDD
- 1 Mini PCI Slot
- 4 LED Indicators

Specifications

CPU Board: AMD Geode LX-800 Low-power CPU board with 256MB DDR SDRAM

I/O Outlets: 1 PS/2 Keyboard/Mouse connector
 1 VGA connector
 2 LAN 10/100/1000M Base-TX Ethernet ports
 4 USB ports (V2.0)
 3 RS-232 and 2 1 RS232/RS422/RS485 ports
 1 DC-In connector
 1 Mini PCI slot
 1 push bottom reset

Storage Bay: 1 2.5" HDD space
 1 CompactFlash slot


LED Indicators: 1 power LED (Green) and 1 HDD LED (Red)
 2 LAN Led (Green)

Power Req.: DC 12V – 36V, 18VA maximum With 2.5" HDD.

Operating Temperature: 0~50 degree C. (32~122 degree F.)

Dimensions: 130.0mm (D) x 200.0mm (W) x 44.2 mm (H)

Accessory: 1 utility Disc
 1 AC-DC 24V adapter with AC power cable
 CBL-KB+MS-Y type keyboard and mouse adapter cable
 2 L-type universal fixers and 4 screws.
 1 2-pin apartable terminal block.
 1 44-pin flat cable and 4 screws for fixing and connecting
 a 2.5" hard disk drive.

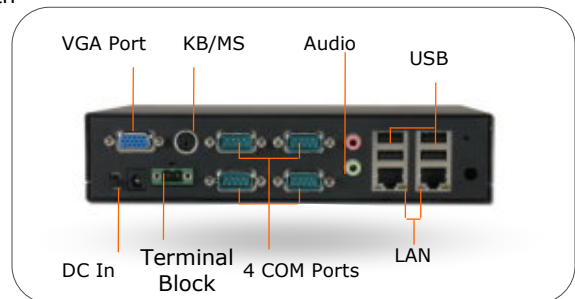

Ordering Information

Model	Description	Accessories
FX5403	AMD Geode LX-800 Embedded System with 2 LANs, 4 COM ports, 4 USB and 256MB DDR RAM.	* 1 AC-DC 24V adapter with power cable * VGA/Audio: WinXP/2K, Linux * LAN Novell 3.X / 4.X Win95/98/NT, OS2, Linux NDIS, MSLAN



FabiaTech Corp.

TEL: 886-2-22789586 FAX: 886-2-22789575

4F-3, No. 18, Lane 609, Chung-Hsin Rd., Sec. 5, San-Chung City, Taipei Hsien, Taiwan, R.O.C.

www.fabiatech.com