

FX5420 - VPN / Firewall Platform

Embedded System with 4 LANs, VGA, 1S, 2USB and DC Input




Features

- Fanless and low power consumption design
- AMD Geode LX-800 Low-power CPU
- 256MB DDR SDRAM inside system
- One PS/2 KB/MS
- One VGA
- 4 LANs
- 1 COM Port
- 2 USB(V2.0)
- One CompactFlash Slot
- Space for one 2.5" HDD

Specifications

- CPU Board:** AMD Geode LX-800 Low-power CPU board with 256MB DDR-RAM
- I/O Outlets:** 1 PS/2 Keyboard/Mouse connector
1 CRT connector (2~64MB SMA)
4 RJ45 connectors (Realtek RTL8100X chipset, 10/000 Base-TX)
2 USB connectors
1 RS-232 connector
1 Push button switch for user defined
1 DC-In connector
- Storage Bay:** 1 2.5" HDD space
1 CompactFlash socket
- Power Req.:** DC 19V – 10VA (with HDD) maximum.
- Operating Temperature:** 0 ~ 45 degree C. (32~113 degree F.)
- LED Indicators:** 1 power LED, 1 status LEDs, 1 HDD/CF access LED, 1 user defined LED and 8 LAN access LEDs
- Dimensions:** 200mm (W) x 130mm (D) x 44mm (H)
- Accessory:** 1 AC-DC 19V adapter with AC power cable
CBL-KB+MS-Y type keyboard and mouse adapter cable
- Optional Item:**

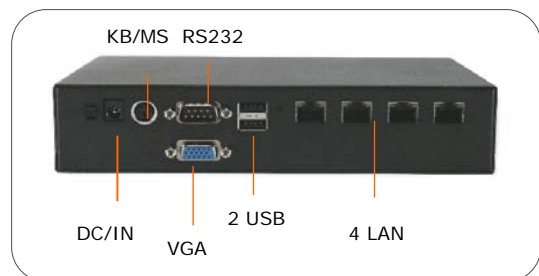

Order Information

Model	Description	Driver
FX5420	AMD Geode LX-800 Embedded System with 4 LANs, 1 COM ports, 2 USB and 256MB DDR RAM.	* VGA Win2K/XP * LAN Novell 3.X / 4.X 2K/XP, Linux, NDIS, MSLAN LAN Novell 3.X / 4.X