


BB-107

ETX ATX Evaluation Base Board (for CM-7100,CM-6121, AW-BS710)

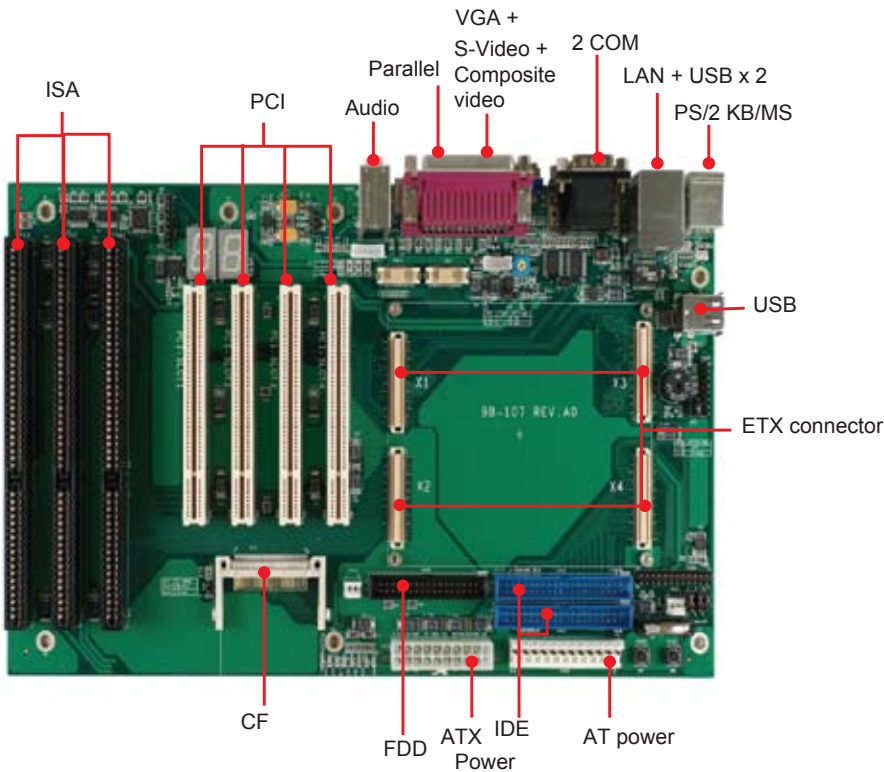

Features:

- ETX 3.0 Compliant
- 4 x PCI and 3 x ISA expansion
- Supports VGA, S-Video, Composite Video and LVDS
- Supports 2 x IDE and 1 x CF
- One 10/100Mbps Ethernet interface
- RoHS Compliant

System

Extended	4 x PCI 3 x ISA
Display	24-bit LVDS channel, 1 x VGA, 1 x S-Video, 1 x Composite Video
Communication	One Intel 82562GT interface 1 x RJ-45 IEEE 802.3 10/100Mbps Compliant Physical Layer
Audio	High definition audio interface Line out, Mic. in, Line in
I/O	2 x IDE, 1 x FDD, 1 x CF, 1 x PS/2 KB/MS, 2 x RS-232, 1 x LPT, 4 x USB, High definition audio interface Line out, Mic in, Line in

Packing List

- 1 x BB-107 Baseboard
- 1 x CD (Manual, Quick installation guide ,Utility driver)

Ordering Information

Standard	
BB-107	ETX ATX Evaluation Baseboard
CM-7100	Intel® Core™ 2 Duo ETX Module
CM-6121	AMD® Geode™ LX800 ETX Module
AW-BS710	Intel® 9Pentium® M/ Celeron® M TEX Module

* Note : All specifications are subject to change without prior notice

Mechanical and Environment

Dimension (L x W)	304.8mm (L) x 177.8mm (W) (12" L x 7" W)
Operating Temperature	0°C ~ 60°C (32°F ~ 140°F)
Operating Humidity	10%~90% relative humidity, non-condensing
Storage Temperature	-20°C ~ 85°C (-4°F ~ 185°F)
Storage Humidity	10% ~ 85% relative humidity, non-condensing